

INSTALLATION INSTRUCTIONS

BIKE ATTACHMENT
 P/N 08L07-SX0-100


1997 ODYSSEY

Issue Date

OCT 1996

PARTS LIST

Bike attachment

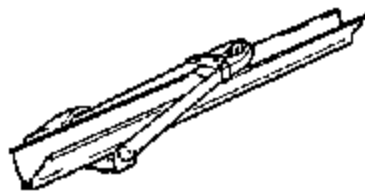

2 Wheel straps



2 End caps


 Allen wrench,
 5 mm


2 Keys



Instruction sheet



TOOLS REQUIRED

T-25 Torx driver

#3 Phillips screwdriver

Torque wrench


INSTALLATION

Before You Begin:


- Be careful not to damage the painted surfaces of the vehicle when installing the bike attachment.
- If you are installing more than one bike attachment, you may need to alternate the mounting positions (front to rear) to allow for handle bar clearance.

Preparing the Bike Attachment


1. Slide a wheel strap onto one end of the bike attachment channel. Repeat on the other end. Be sure both wheel strap buckles are on the same side.

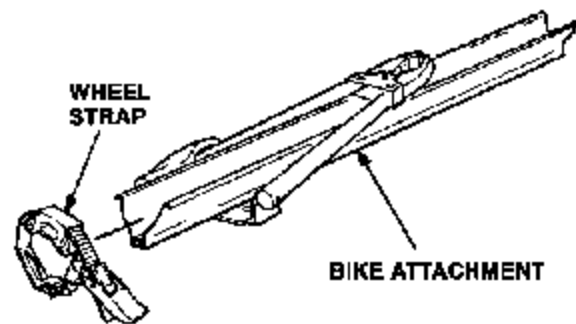

2. Install an end cap on the bike attachment channel by aligning the locktabs on the end cap with the holes in the channel. Push down on the end cap until the locktabs "click" into place. Repeat on the other end.

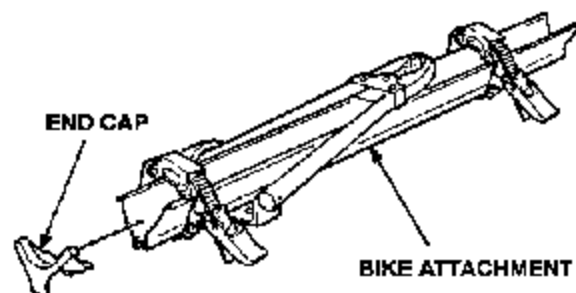


3. Remove the three mounting levers and T-bolts from the bike attachment, and set them aside to be installed later.

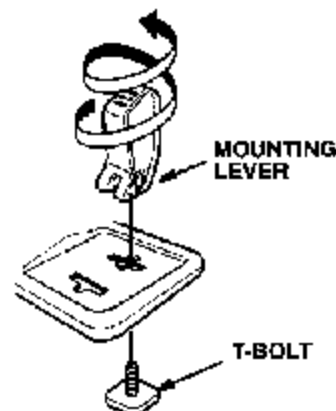


Installing the Bike Attachment


4. Remove the rubber molding from the front and rear roof rack crossbars. Retain the rubber molding to be reinstalled if the bike attachment is removed.

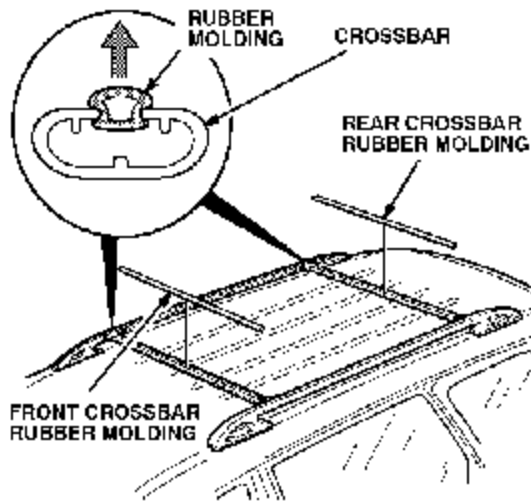


5. Remove the roof rack assembly from the roof (eight Phillips screws). Leave the adapter blocks in their original positions.

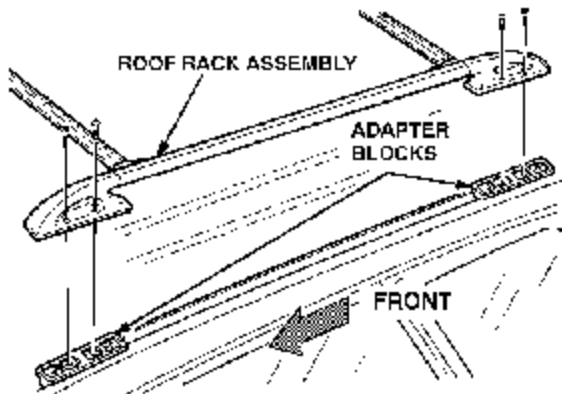


6. Using a T-25 Torx driver, remove the Torx screw from each roof rack crossbar (front and rear) on one side of the roof rack; then remove the side rail from the roof rack.

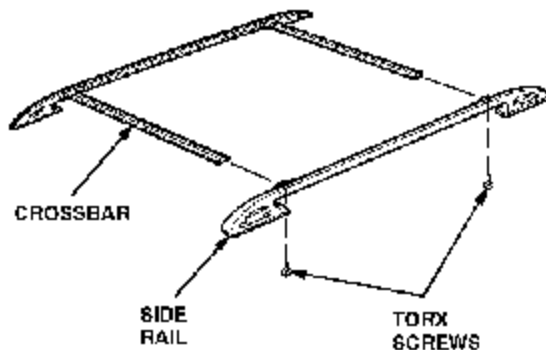


7. Install the appropriate number of T-bolts into the channel of the crossbar (two T-bolts for the front of the bike attachment, and one T-bolt for the rear).

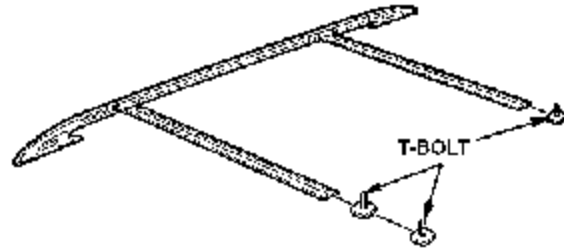

8. Reinstall the side rail on the roof rack with the Torx screws removed in step 6. Tighten the screws securely.
9. Reinstall the roof rack, and tighten the eight screws securely. Torque the Phillips screws to 7 to 11 N·m (5 to 8 ft·lb).
10. Position the bike attachment over the T-bolts you installed on the roof rack, and install the mounting levers removed in step 3. Do not tighten or lock the mounting levers at this time.

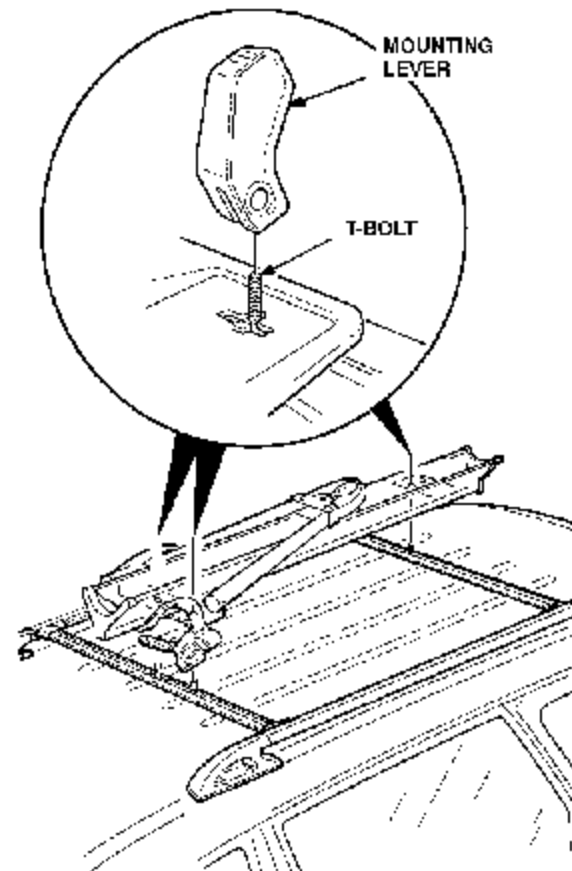


11. Position the bike attachment on the front and rear crossbars. Turn and adjust the mounting lever to lock the bike attachment to the roof rack. Check for firm pressure while you push down on the mounting lever to lock it into place.

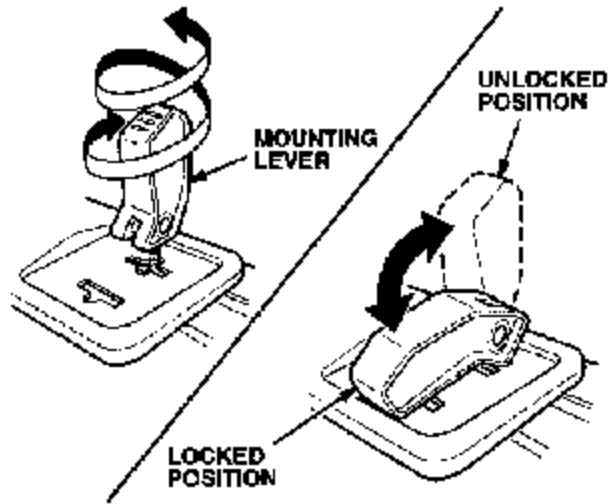


- If the mounting lever pressure is too tight (the lever will not lock into place), lift up on the lever and turn it counterclockwise.
- If the mounting lever pressure is too loose (the lever locks into place, but the bike attachment is loose on the crossbars), lift up on the lever and turn it clockwise.

12. Use the 5 mm Allen wrench (supplied) to check and tighten, if needed, the clamping jaw mounting hardware.

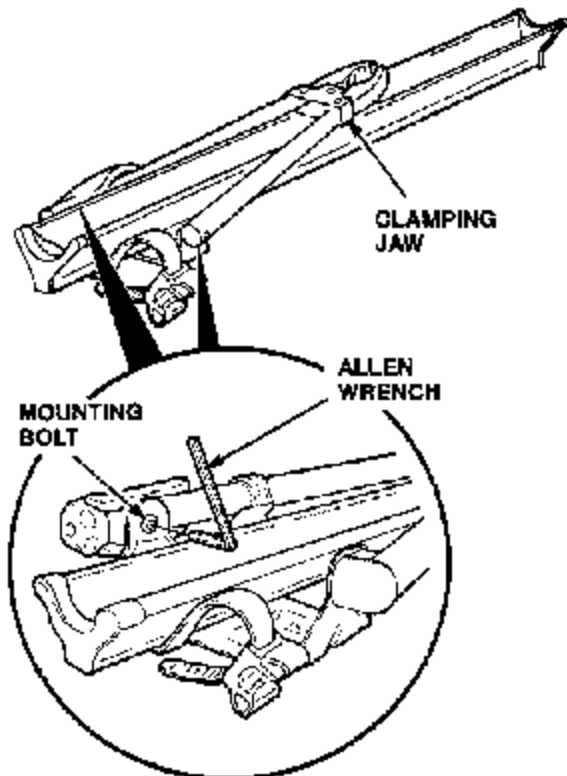

13. Slide the security retainer in place; then close the locking clamp lever. To deter theft of the bike attachment, lock the locking clamp lever with the key.

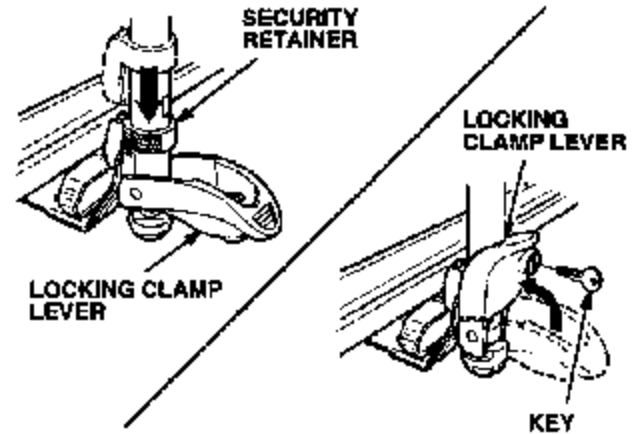

14. Put these instructions and the Bicycle Installation Instructions in the glove box for future reference.
15. Put the Allen wrench in the glove box for future use.