

# HONDA INSTALLATION INSTRUCTIONS

Accessory  
**FRONT SEAT ARMREST**

Application  
**1997 ODYSSEY (LX)**


Publications No.  
**All 18329**  
Issue Date  
**OCT 1996**

## PARTS LIST

Armrest



Armrest pin



2 Washer-bolts,  
6 x 14 mm



Washer



2 Bushings



Wave washer



Cap nut



## TOOLS AND SUPPLIES REQUIRED

Metric measuring tape

Utility knife

10 mm and 17 mm Combination wrenches

Phillips screwdriver

Flat tip screwdriver

Torque wrench

Awl

Felt tip pen


## INSTALLATION

**Before You Begin:**


This armrest is installed on the left side of the front passenger's seat-back.

## Preparing the Seat-Back


1. Remove the seat track center cover from the front passenger's seat (three screw caps and four self-tapping screws).

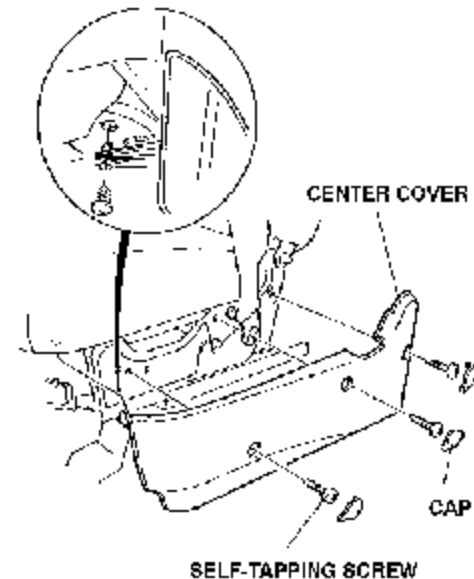

2. Using a felt-tip pen, measure and mark the front seat-back. At the mark, punch an awl through the seat-back cover and pad to confirm you are at the center of the armrest pin base hole.

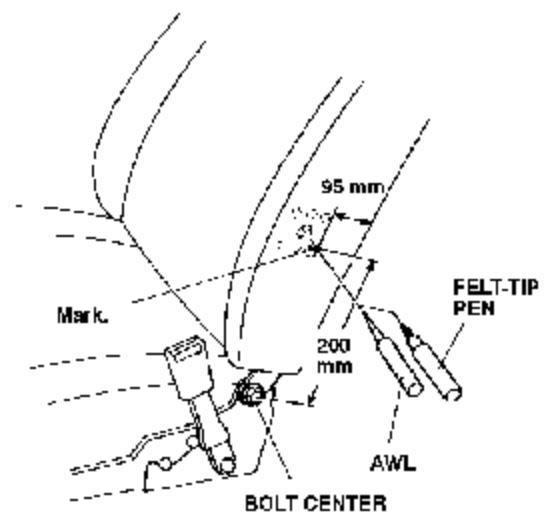


- Using a utility knife, cut out a 50 mm square hole in the seat-back cover, centered over the mark. Cut out the urethane pad along the edges of the square hole in the seat-back cover.

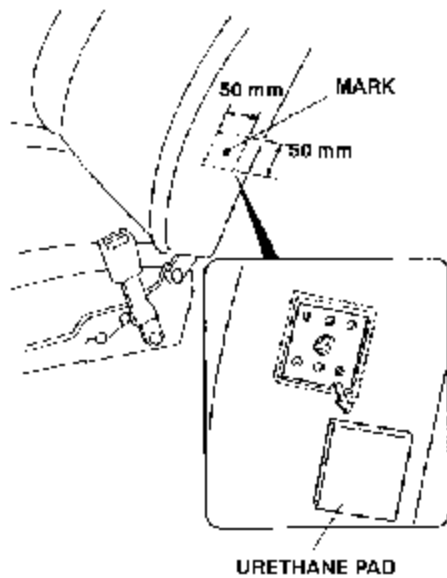


#### Installing the Armrest

- Position the armrest pin on the pin base. Trim the urethane pad, as needed, to allow the armrest pin to fit properly. Install the two 6 x 14 mm washer-bolts, and torque the bolts to 10 N·m (7 lb-ft).

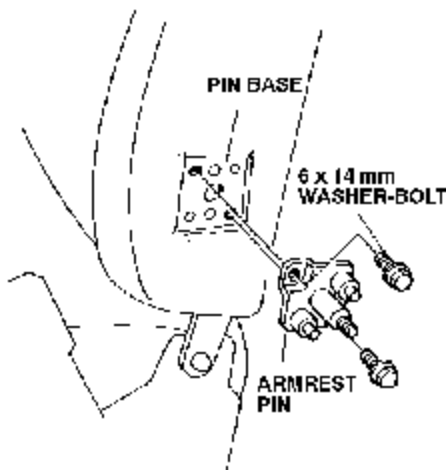

- Zip open the armrest cover, and turn the cover inside out. Slide a bushing and the armrest over the pin, then install the remaining bushing, plain washer, wave washer, and cap nut. Torque the cap nut to 35 N·m (25 lb-ft).

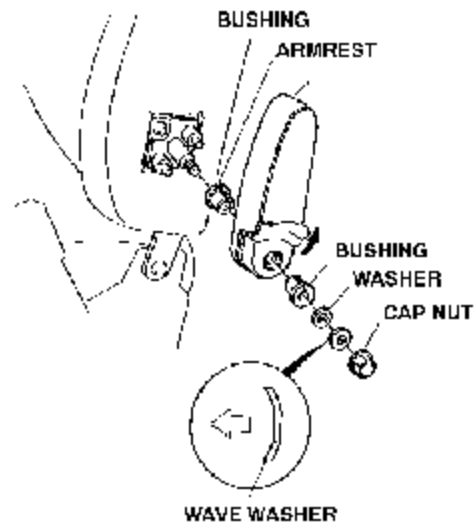

- Zip up the armrest cover.
- Check that the armrest moves smoothly without binding.
- Reinstall the seat track center cover.