



INSTALLATION INSTRUCTIONS

Accessory	Application	Publications No.
FRONT MAP LIGHT	1997 ODYSSEY (LX)	All 18334
		Issue Date
		OCT 1996

PARTS LIST


Front Map Light:

Gray P/N 08E10-SX0-100


Light Beige P/N 08E10-SX0-100F

Jade P/N 08E10-SX0-100G


Map light

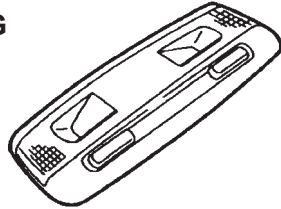


Bracket

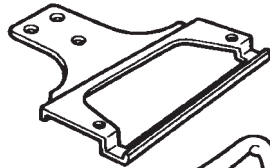

Map light harness

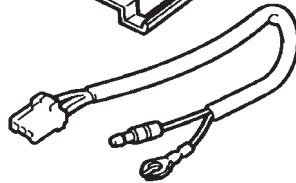


Template

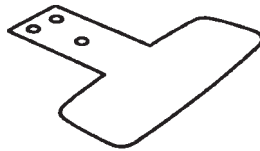

2 Washer-screws,
4 x 16 mm



Joint connector cover



Joint connector case



Cushion tape



TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver

Utility knife

Felt-tip pen

Ruler

Pliers


10 mm Open-end wrench

Flat tip screwdriver

Piece of wire

Diagonal cutters

Illustration of the Map Light Installed on the Vehicle

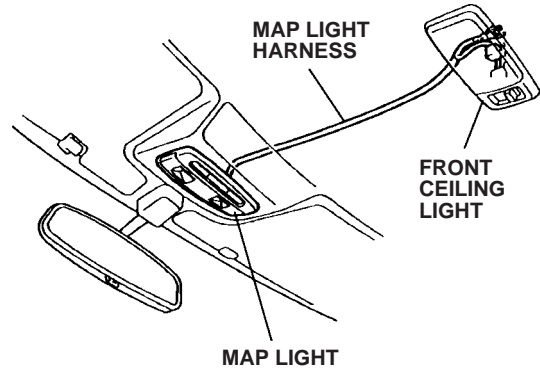


INSTALLATION


Before You Begin:

1. Make sure you have the anti-theft code for the radio, then write down the frequencies for the preset buttons.
2. Disconnect the negative battery cable from the battery.


3. Remove the rearview mirror (three screws).

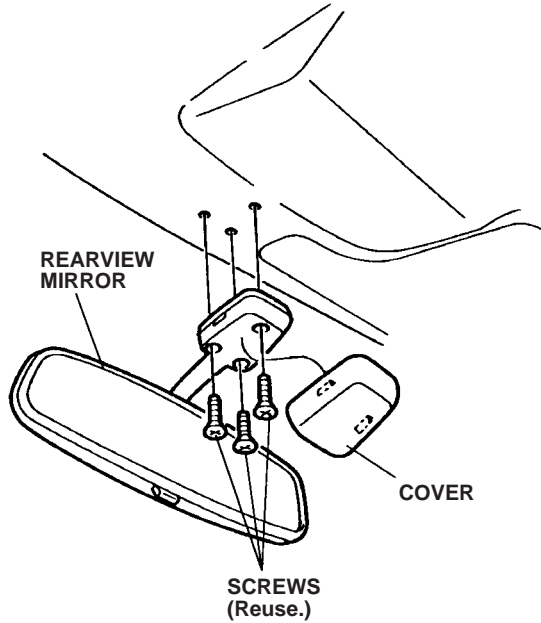

4. Position the template on the roof, and align the holes in the template with the three holes in the headliner. Loosely install the three screws you just removed.

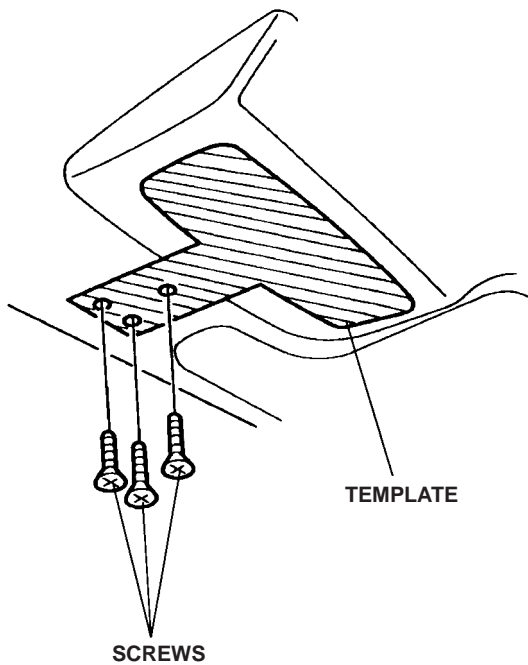


5. Using a felt-tip pen, mark the edge of the template on the headliner.

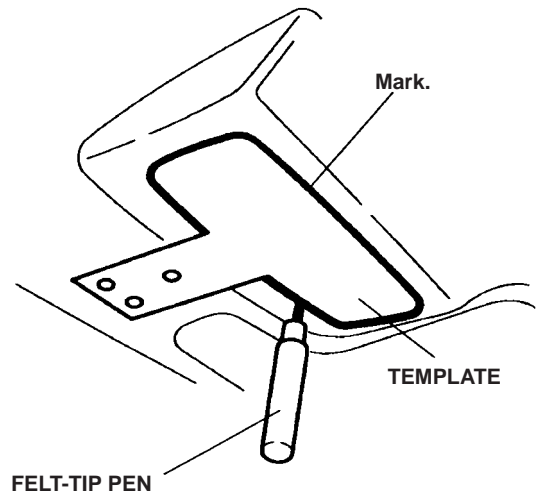

6. Remove the three screws and the template.


7. Continue the ends of the mark with a felt-tip pen.

8. Using a utility knife, slowly and carefully cut out the marked area from the headliner. Do not cut outside the marked area.

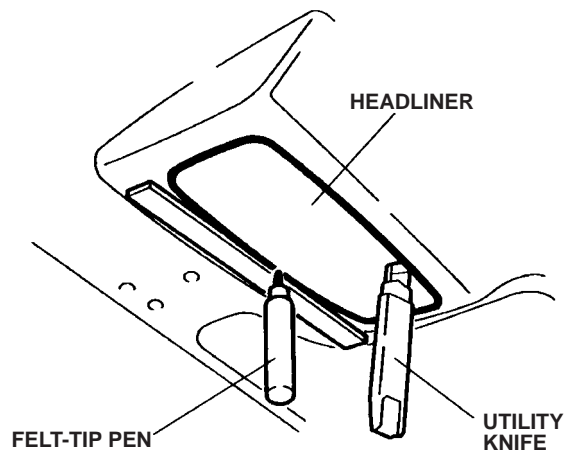


9. Remove the front ceiling light:

- Remove the lens and the screw under the lens.
- Pull the light down, and unplug the connector from the ceiling light.

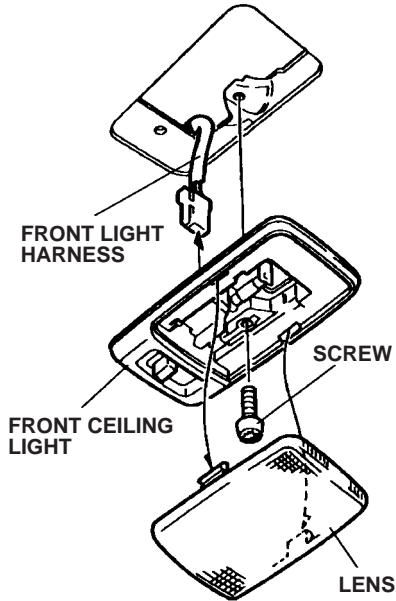


10. Using a piece of wire as a guide, route the map light harness through the hole in the roof panel. Pull the headliner down with your finger to route the harness through the panel hole.

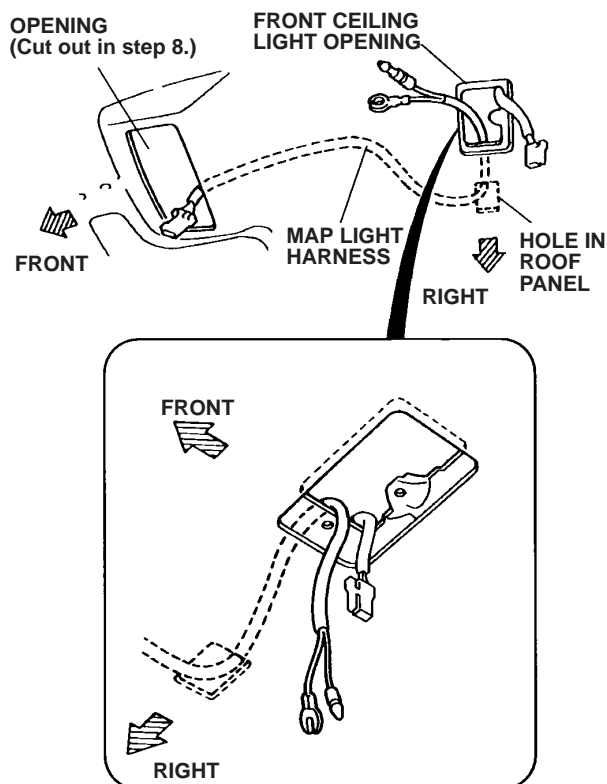


11. Install the joint connector cover and case:

- Cut 80 mm of the protective tube from the front ceiling light harness in the area shown.

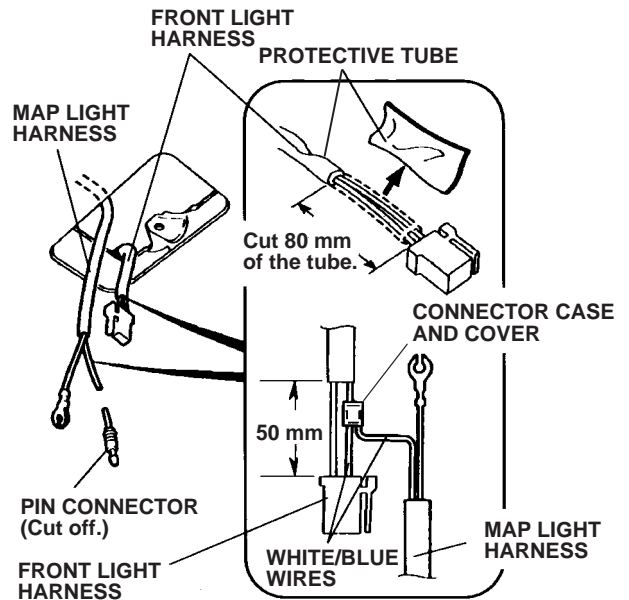


- Using diagonal cutters, cut the pin connector from the white/blue wire of the map light harness. Connect the harness to the white/blue wire of the front ceiling light harness with the joint connector (case and cover).
- Install the joint connector on the white/blue wire of the front ceiling light harness at a position 50 mm from the front ceiling light harness connector.
- Press the cut end of the white/blue wire of the map light harness into the joint connector case, then bend and push the rest of the wire into the groove of the connector case.

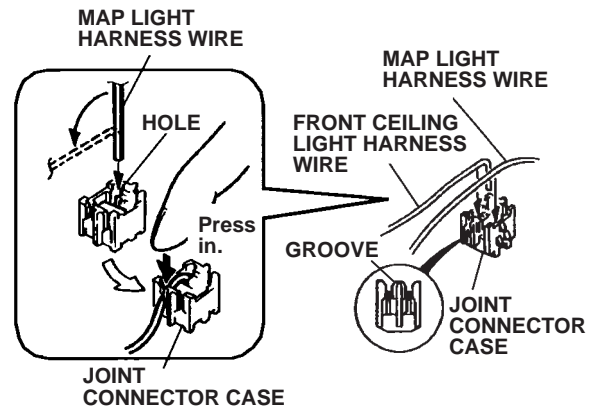


- Route the white/blue wire of the front ceiling light harness through the remaining groove of the connector case.

- Place the cover over the joint connector case, and lightly press it down to the first lock position by hand. Using pliers, press the cover down to the second lock position.

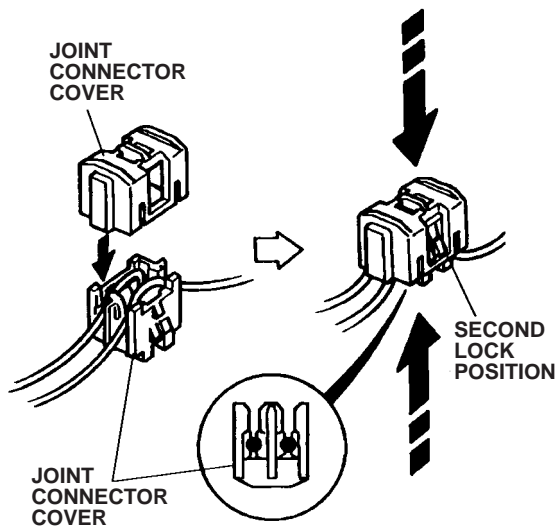

12. Wrap the cushion tape around the joint connector.

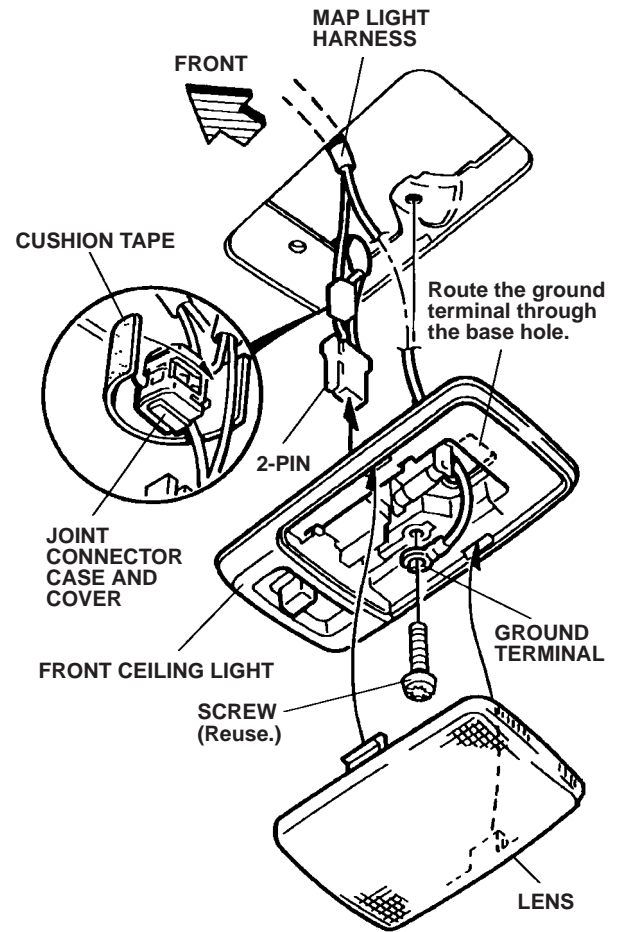


13. Connect the 2-pin connector of the front ceiling light harness to the ceiling light, then route the ground terminal of the map light harness down through the hole in the front light base. Position the front ceiling light on the headliner, and install the screw you removed in step 9 with the ground terminal of the map light harness placed under the head of the screw.

14. Position the joint connector on the roof panel.


15. Reinstall the front ceiling light lens.

16. Slide the bracket between the roof lining and roof panel, and align the holes.

17. Position the rearview mirror on the roof, and install the three screws you removed. Install the cover.

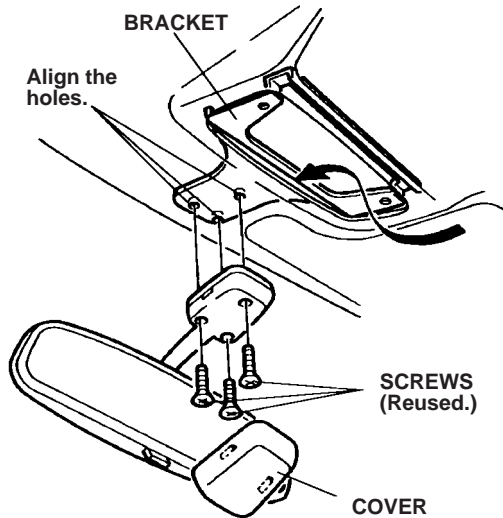

18. Remove the lens from the map light. Position the map light on the roof lining (bracket), and install the two 4 x 16 mm washer-screws. Reinstall the lens.

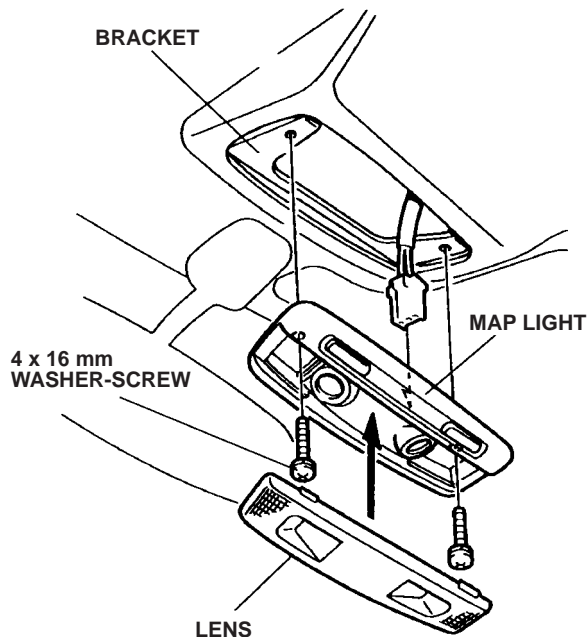

19. Check that all wire harnesses are routed properly and all connectors are plugged in.

20. Reconnect the negative cable to the battery.

21. Reset the clock.

22. Enter the customer's radio anti-theft code, and reset the radio station presets.

OPERATION OF THE FRONT MAP LIGHT

- To turn on the map light, press the switch on the map light.
- Press the switch again to turn off the map light.